

RF-330TK



Precious metal-brush motors


OUTPUT : 0.01W~0.6W (APPROX)

WEIGHT : 32g (APPROX)

Typical Applications Home Appliances : Air Freshener

| MODEL | VOLTAGE | | NO LOAD | | AT MAXIMUM EFFICIENCY | | | | STALL | | | |
|----------------|-----------------|---------------|---------|---------|-----------------------|---------|--------|------|--------|--------|------|---------|
| | OPERATING RANGE | NOMINAL | SPEED | CURRENT | SPEED | CURRENT | TORQUE | | OUTPUT | TORQUE | | CURRENT |
| | | | r/min | A | r/min | A | mN-m | g-cm | W | mN-m | g-cm | A |
| RF-330TK-07800 | 1~3 | 1.5V CONSTANT | 800 | 0.004 | 570 | 0.010 | 0.083 | 0.84 | 0.005 | 0.29 | 3.0 | 0.025 |

DIRECTION OF ROTATION

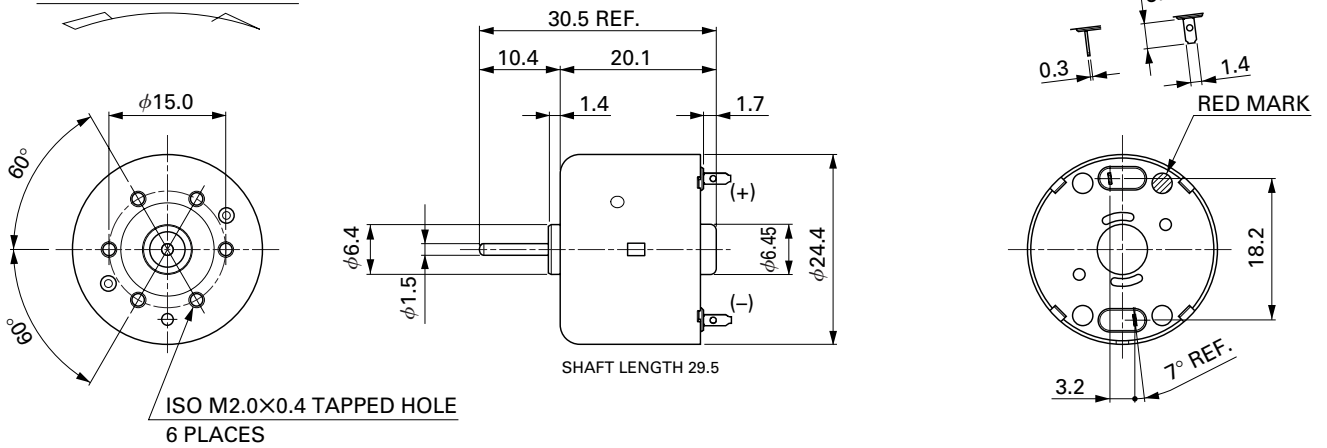

Usable machine screw length 1.5 max. from motor mounting surface.

UNIT: MILLIMETERS

RF-330TK-07800

1.5V

